
## RETAINER: The factory does not always cut these the same.

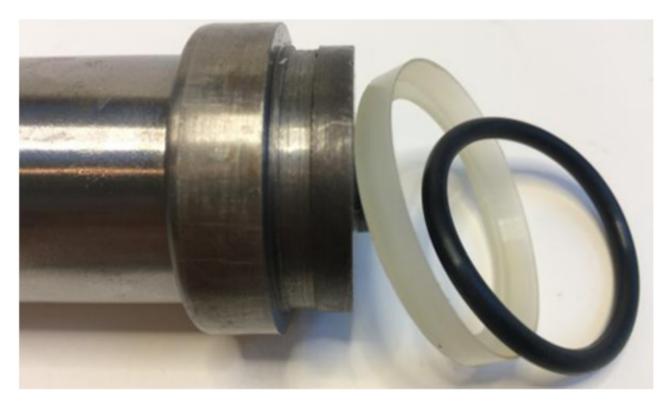

## TWO OPTIONS TO FIX

OPTION 1: Use sandpaper and gently sand the inside of the retainer.

OPTION 2: Boil the retainer in water. **Do not let the retainer touch the bottom or sides of the hot pan.** This makes the retainer soft and pliable. So you are able to get it over the top of the ram without any sanding. When installed, help the retainer regain its shape with your hands.